

## Di2 Mounting for ShockStop Suspension Seatpost

Thank you for purchasing the ShockStop Suspension Seatpost Di2 Battery Mounting Kit. If you have any questions at all please visit [www.redshiftsports.com/FAQ](http://www.redshiftsports.com/FAQ) or email [support@redshiftsports.com](mailto:support@redshiftsports.com) for assistance. Improper installation or use may void the product's warranty policy and may result in malfunction or breakage of the battery and/or seatpost.

- 1** Remove preload plug and spring spacer from seatpost



- 2** Install 1 o-ring on the top groove of the battery




Ensure there is a light coat of grease on the o-ring (pro tip: you can use some grease from the seatpost spring if needed)


- 3** Slide the battery into the spring spacer until it is just below the top of the spacer – You may have to wiggle the battery and o-ring to get it started.



- 4** Slide the second o-ring onto the battery until it touches the bottom of the spacer

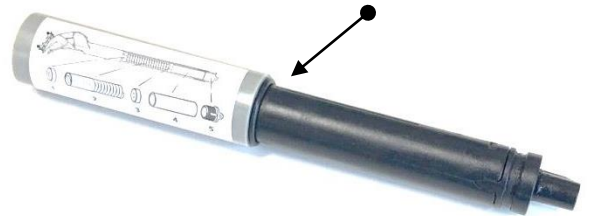

- 5** Install the spacer and battery into seatpost

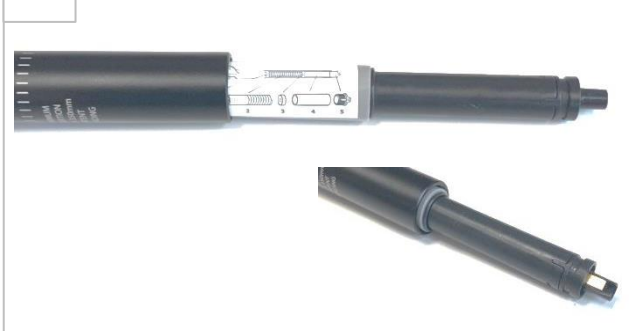

- 6** Lightly grease the inside face of the preload plug and reinstall. Set desired preload.



**Note:** The di2 battery will protrude from the end of the seatpost as show. It should be snug inside the seatpost but will move if pulled or rotated with force.

 **WARNING**

Failure to follow these instructions may result in malfunction or breakage of the battery and/or seatpost.